


## Installation Instructions Festec Stainless Steel Flange Shields

PUT ON GLOVES

Wrap the shield around the flange

Insert end with catches in between mesh and band

Raise the handle. Put the latch into catch and close the handle. Shield should fit snug. Latch does not have to fit into last catch position

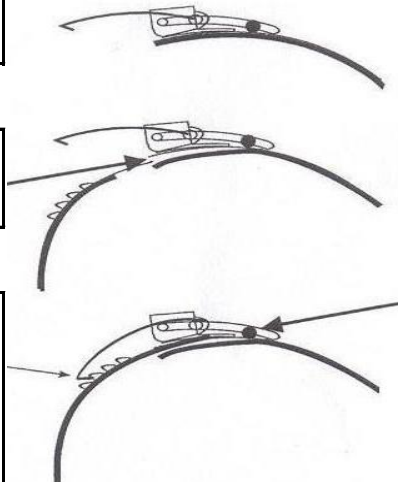

Festec Trade BV  
Kroonstraat 24  
4879 AV Etten-Leur  
Nederland

T +31 (0)76 30 30 500  
F +31 (0)76 30 30 510  
E [info@festec.nl](mailto:info@festec.nl)  
I [www.festec.nl](http://www.festec.nl)

Optional: Insert the safety pin or the lockout/tagout device through hole in latch